

WALLS



Product description

ADEZZ produces walls in the following materials: Aluminium, Corten steel (both customised possible) and Fibreglass (only in standard dimensions).

We can produce our Aluminium and Corten Steel walls in almost any dimension. You can calculate the price yourself via our custom module on the website (after logging in).

Corten Steel walls look very solid and have a natural appearance.

Aluminium walls are available in almost any RAL colour.

Fibreglass walls have the great advantage that they are lighter than the other two materials. Thanks to the hollow construction you can easily mount accessories yourself.

SPECIFICATIONS

General information

Our walls consist out of:

- Thickness: Corten Steel 2mm
- Thickness: Aluminium 3 mm
- Thickness: Fibreglass 3 mm
- Mounting strips (± 5cm per side) along the length of the base
- Hollow construction
- 5 year warranty (descending)

Corten

- Brown-orange rust colour
- Delivered un-rusted
- Rust process takes 4-5 months
- BIO rust accelerator available

Fibreglass

Standard colours RAL 7021, RAL 7035, RAL 9016, RAL9010.

Aluminium

Standard colours RAL 7021, RAL 7035, RAL 9016.

Our aluminium walls are available in almost any RAL colour (start-up costs apply).

IMPORTANT

Points of attention

- The products must be unpacked immediately after delivery.
- Corten Steel should never be constantly in moisture, it should drain well and ventilate in all situations.
- We only use Corten steel type S355JOWP.
- Coastal areas: We do not recommend using Corten steel within a radius of 2 km from a coastline.
- During the weathering process rust residue can come off the product.
- Drilling / grinding in the material is not permitted.


Maintenance

- Annual cleaning by removing dirt using clean tap water.
- Clean aluminium and fibreglass with our Adezz Cleaner.
- **Note!** Do not use a high-pressure cleaner or abrasive sponge.
- Maintenance products are sold by Adezz (page 4).

PLACEMENT


INSTALLATION

1. Provide a level, solid surface. If not done carefully, this can cause tensions which can result in damage to the product.
2. Place the wall on the flat foundation, make sure it is firm and level.

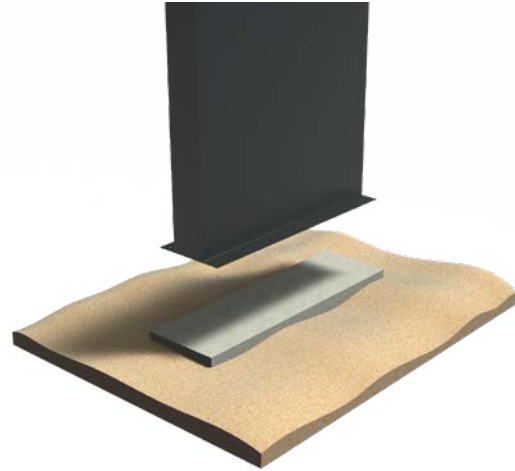


3. Drill holes in the foundation corresponding to the holes in the wall.
4. Then fix the wall to the foundation using bolts and plugs, if necessary use a chemical anchor.

Note! First loosely tighten all the bolts, after which they can be tightened fully one by one.

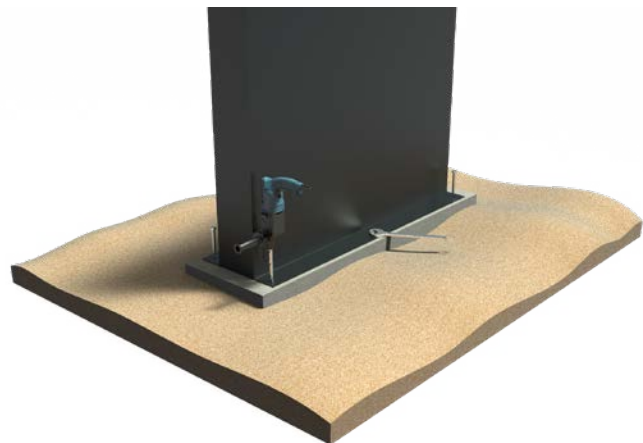

5. Then cover the foundation with a layer of soil of at least 10 cm for extra stability and then finish potential paving.

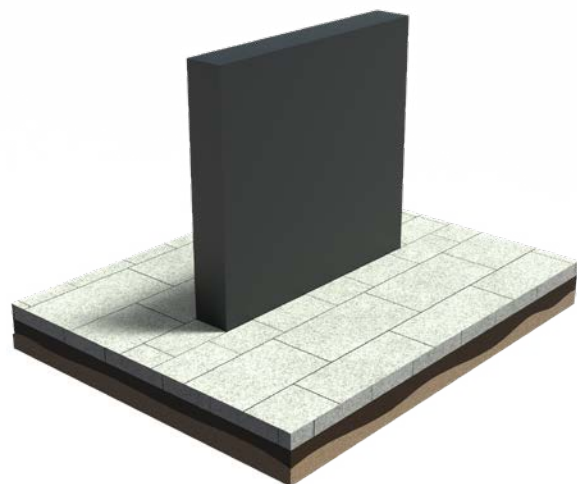



MODELS


For a complete overview of all our products and specifications, please visit www.adezz.com



WALL CORTEN



WALL ALUMINUM

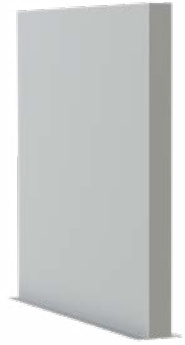

WALL FIBREGLASS

ACCESSORIES

ACCESSORIES

All our accessories meet the highest standards and are a highly suitable addition to our products. Visit www.adezz.com for a complete overview of our accessories.



CLEANER & PROTECTOR

We recommend cleaning our products at least twice a year. For optimal results, use the ADEZZ BIO Cleaner & Protector. Always read the descriptions on the packaging carefully before use.



RUST ACCELERATOR

Our Corten Steel products are delivered un-rusted and the weathering process will take approximately 4-5 months. This process can be accelerated with the BIO rust accelerator available on our website. Always read the descriptions on the packaging carefully before use.



CORTEN VARNISH

Corten varnish can be applied to the Corten Steel products to stop the weathering process. Always read the descriptions on the packaging carefully before use.