



ADEZZ

DESIGN TO GROW

Pond walls

Pond walls

If you add the pond wall to your pond, it brings even more liveliness to the garden. We have pond walls that are fixed to our pond and freestanding pond walls that you can place loose at your pond.

You can also choose a letterbox or three-pipe waterfall. This completes the picture!

USING YOUR POND IN WINTER


- In freezing temperatures, always remove the plug from the power socket.
- Reduce the water level to at least 10 cm below the edge.
- We recommend using an ice preventer (available at any garden centre or hardware store).
- If the above conditions are met, the pump can remain in the water. You can also remove the pump from the pond and store it in water (above 0°C) over winter.



**OPTION
CUSTOM MADE**



Material corten steel

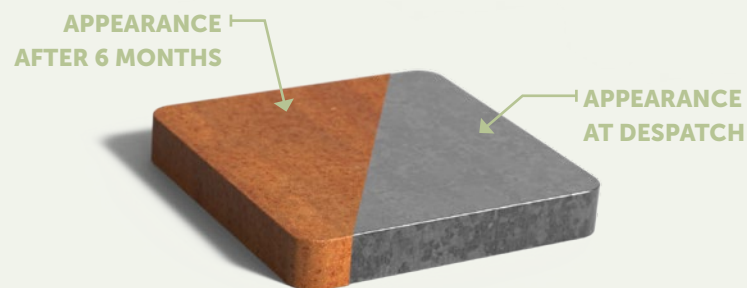

Tranquil and evocative, our corten steel pond wall is a wonderful addition to your garden. The pond wall can be added to the short or long side of the pond, making the pond an even more dynamic garden feature. We have pond walls with either a letterbox waterfall or a three-spout fountain waterfall. There's a wall to suit every pond and garden!

Corten steel has an orange-brown colour, the result of a natural rust layer. Another name for corten steel is weathering steel: weather conditions have a positive effect on this material.

Corten steel is a metal alloy made by adding copper, phosphorus, silicon, nickel and chromium to iron. When exposed to air, the material forms a protective layer of rust. This natural coating prevents further corrosion, so the pond walls will last for many years.


SPECIFICATIONS

- 5-year guarantee (pumps 2-year guarantee).
- The product can be customised.
- For fixed pond wall including stainless steel fasteners.
- Includes pump.
- Corten steel pond walls are hard-wearing, weather-resistant, low-maintenance and durable.
- The corten steel has a standard thickness of 2 mm.
- Products are delivered without rust. The corten steel rusting process takes about 4-5 months, depending on weather conditions.
- The rust can be fixed by applying Owatrol. This is a penetrating rust inhibitor that forms a protective anti-rust coating. Owatrol protects the product and stops the rust on corten steel flaking off.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. If the product is left in its packaging, it may develop uneven rust patches.
- We do not recommend using corten steel within 2 km of a coastline.
- The weathering process may cause rust run-off.
- The guarantee expires if you drill or grind in a way that is not specified.
- The water used in this product should have a neutral pH value (7) to protect the look and quality of the material.
- Clean annually by spraying coarse dirt off the product with tap water.

Material aluminium

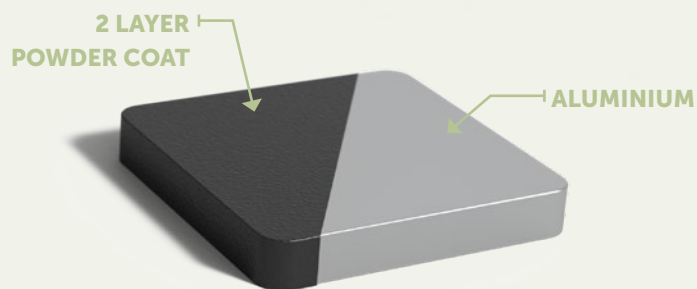

Tranquil and evocative, our aluminium pond wall is a wonderful addition to a garden. The pond wall can be added to the short or long side of the pond, making it an even more dynamic garden feature. We have pond walls with a long waterfall or with a three-spout fountain. There's a wall to suit every pond and garden!

Aluminium is corrosion resistant: the pond can withstand freezing temperatures and other weather conditions without damage. You will be able to enjoy this product for many years. The aluminium pond wall is available in several colours.

Once constructed, the aluminium pond wall is given several finishing treatments. The material is roughened to allow better adhesion of the powder coating. This powder coating is available in different colours and is applied with a strong adhesive primer. Finally, the aluminium is finished with a hard topcoat. This ensures that our pond walls are scratch resistant.

SPECIFICATIONS

- 5-year guarantee (pumps 2-year guarantee).
- The product can be customised.
- For fixed pond wall including stainless steel fasteners.
- Includes pump.
- Aluminium pond walls are very robust, hard-wearing, resistant to corrosion and durable.
- The aluminium has a thickness of 3 mm.
- Scratch-resistant topcoat.
- We also supply professional maintenance products.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. This moisture can cause stains that are difficult to remove.
- The guarantee expires if you drill or grind in a way that is not specified.
- The water used in this product should have a neutral pH value (7) to protect the look and quality of the material.
- Clean annually by hosing dirt from the product with clean tap water, followed by cleaning with detergent. Do not use a pressure washer and/or scouring pad for this purpose. This damages the coating.
- Limescale can be removed with ADEZZ Descaler BIO.

RAL COLOURS

Standard RAL colours are RAL 7016, RAL 7021, RAL 9005 and RAL 9016. For all other available RAL colours, please check our website. There is a start-up charge for these colours.

Note! Colours may vary from the image.



RAL 7016

RAL 7021

RAL 9005

RAL 9016

Installation

1. Provide a level, solid surface. If not done carefully, this can cause tensions which can result in damage to the product.
2. Place the pond in the desired position, and if required the fixed pond wall.
3. On the inside hook the clamp over the side of the pond wall. Then tighten the bolts until they clamp against the underside of the pond edge.

Note! First loosely tighten all the bolts, after which they can be tightened fully one by one.

4. In addition to fixed pond walls, you can also opt for a free-standing wall. Place a free-standing pond wall on a flat, stable foundation below ground level or on a flat, stable pavement.
5. Drill holes in the foundation / pavement at the locations that correspond to the holes at the bottom of the pond wall. Then attach the wall to the foundation / pavement with bolts and plugs.

Note! First loosely tighten all the bolts, after which they can be tightened fully one by one.


6. The water blade can easily be placed in the wall via a hatch in the back of the pond wall.
7. Connect the water hose to the water blade before replacing the hatch.
8. After all components have been placed, the pump can be connected and the pond can be filled with water.



Design rules waterfall


When installing a fixed pond wall with a waterfall, always take the following dimensions into account. If these dimensions are not met, a properly functioning waterfall cannot be guaranteed.

1. Minimal 200 mm
2. Maximum 400 mm
3. Minimal 800 mm
4. Minimal 400 mm
5. Size waterfall 150 mm (fixed dimension)

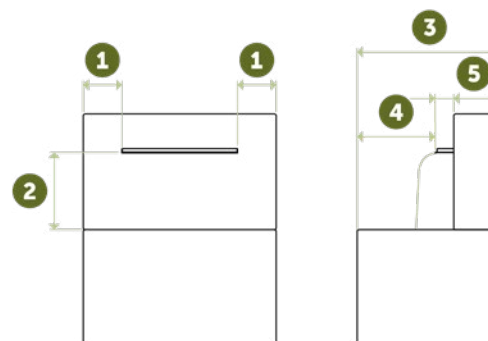


When installing a free standing pond wall with a waterfall, always take the following dimensions into account. If these dimensions are not met, a properly functioning waterfall cannot be guaranteed.

1. Minimal 200 mm
2. Maximum 400 mm
3. Minimal 550 mm
4. Minimal 400 mm
5. Size waterfall 150 mm (fixed dimension)

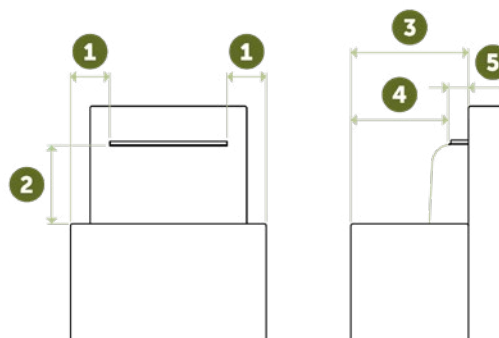


When installing a fixed pond wall with a tube waterfall, always take the following dimensions into account. If these dimensions are not met, a properly functioning waterfall cannot be guaranteed.

1. Minimal 200 mm
2. Maximum 400 mm
3. Width waterfall 800 mm (fixed dimension)
4. Minimal 750 mm
5. Minimal 350 mm
6. Size waterfall 150 mm (fixed dimension)

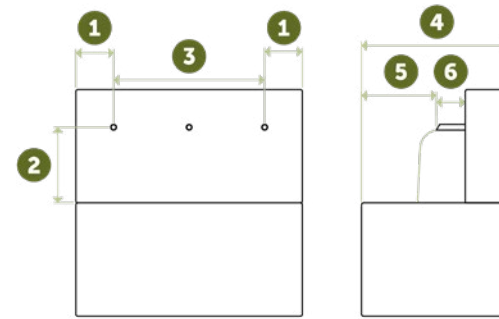

When installing a free standing pond wall with a tube waterfall, always take the following dimensions into account. If these dimensions are not met, a properly functioning waterfall cannot be guaranteed.

1. Minimal 200 mm
2. Maximum 400 mm
3. Width waterfall 800 mm (fixed dimension)
4. Minimal 500 mm
5. Minimal 350 mm
6. Size waterfall 150 mm (fixed dimension)

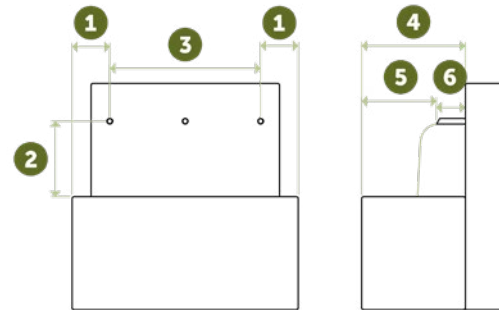

Models

For a complete overview of all our products and specifications, please visit www.adezz.com.



**WALL PLACED ON POND
CORTEN STEEL**



**WALL FREESTANDING
CORTEN STEEL**



**WALL PLACED ON POND
ALUMINIUM**



**WALL FREESTANDING
ALUMINIUM**

Accessories

All our accessories meet the highest standards and are a highly suitable addition to our products. Visit www.adezz.com for a complete overview of our accessories.



CLEANER & PROTECTOR

ALUMINIUM

We recommend cleaning our products at least twice a year. For optimal results, use the ADEZZ BIO Cleaner & Protector. Always read the descriptions on the packaging carefully before use.



DESCALER

ALUMINIUM

We recommend the use of ADEZZ BIO Descaler + to remove limescale from your products. Always read the directions on the packaging carefully before use.



RUST ACCELERATOR

CORTEN STEEL

Our corten steel products are delivered un-rusted and the weathering process will take approximately 4-5 months. This process can be accelerated with the BIO rust accelerator available on our website. Always read the descriptions on the packaging carefully before use.



CORTEN VARNISH

CORTEN STEEL

Corten varnish can be applied to the corten steel products to stop the weathering process. Always read the descriptions on the packaging carefully before use.



ADEZZ

DESIGN TO GROW

Spending time outdoors has soared in popularity over the last few years, becoming an increasingly important part of our daily lives. Our brands ADEZZ, FORNO and FURNS offer a diverse range of products guaranteed to enhance the outdoor experience. Our collections create an ambience in which you can enjoy your garden to the fullest.

All brands have their own character, but they are designed to work together, allowing you to create endless combinations. The materials, finishes and styles are repeated across the collections so that they coordinate beautifully. The result? A long-lasting, stylish garden design: from sleek edging to exclusive furniture and from sturdy fireplaces to elegant water tables.

We design and manufacture all our products in-house, ensuring that we can continue to provide the high quality that you have come to expect from us. And we do this at the most competitive price possible. All our products are made in Europe with the utmost care, so we can be sure that they meet our exacting standards.

