



ADEZZ

DESIGN TO GROW

CARREZ

CARREZ

This planter with square corners looks great in gardens with clean lines. The sleek, double-turned edge gives it a sturdy appearance. The CARREZ is also ideal for use as a divider in hospitality venues.



**OPTION
CUSTOM MADE**




**OPTION
OPEN BOTTOM**



**OPTION
INFINTY SYSTEM**



Material corten steel

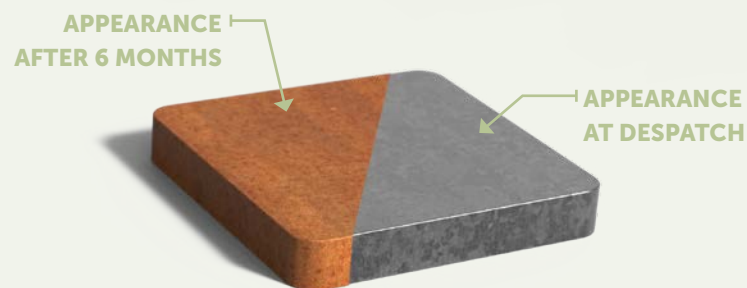

The CARREZ corten steel planter will add warmth and boldness to any garden, thanks to the orange-brown patina on the metal. This patina is formed by a natural layer of rust. Another name for corten steel is weathering steel: weather conditions have a positive effect on this planter.

Corten steel is a metal alloy made by adding copper, phosphorus, silicon, nickel and chromium to iron. When exposed to air, the material forms a protective layer of rust. This natural coating prevents further corrosion, extending the planter's life.


SPECIFICATIONS

- 5-year guarantee.
- Corten steel planters are very robust, hard-wearing, weatherproof, low-maintenance and durable.
- The planter has hidden feet (15 mm) or feet (90 mm) and drainage holes. This provides optimal drainage.
- The corten steel has a standard thickness of 2 mm.
- The planter can be customised.
- Products are delivered without rust. The corten steel rusting process takes about 4-5 months, depending on weather conditions.
- The rust can be fixed by applying Owatrol. This is a penetrating rust inhibitor that forms a protective anti-rust coating. Owatrol protects the planter and stops the rust on corten steel flaking off.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. If the product is left in its packaging, it may develop uneven rust patches.
- Ensure proper drainage.
- Do not use an overflow pipe; no excess water should remain in the corten steel planter. This can cause the metal to corrode due to the interaction of oxygen and soil.
- Do not use hydro pellets: they retain moisture.
- We do not recommend using corten steel within 2 km of a coastline.
- The weathering process may cause rust run-off.
- The guarantee expires if you drill or grind in a way that is not specified.

Material aluminium

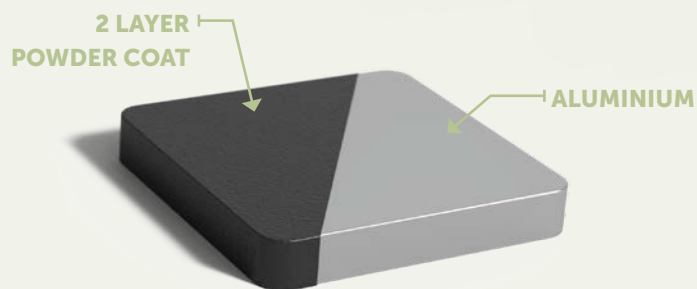

The CARREZ aluminium planter gives gardens a timeless look. The planter is corrosion resistant. By default, it is not waterproof. Aluminium is very lightweight. The aluminium planter can be left outside all year round without damage, even in freezing temperatures. That means that this you will enjoy this planter for many years.

Once constructed, the planter is given several finishing treatments. The metal is roughened to allow better adhesion of the powder coating. This powder coating is available in a variety of colours and is applied with a strong adhesive primer. Finally, the planter is finished with a hard topcoat. This ensures that the CARREZ aluminium planter is scratch resistant.

SPECIFICATIONS

- 5-year guarantee.
- Aluminium planters are very robust, hard-wearing, resistant to corrosion and durable.
- The aluminium has a thickness of 3 mm.
- The planter has hidden feet (15 mm) or feet (90 mm) and drainage holes. This provides optimal drainage.
- Scratch-resistant topcoat.
- The planter can be customised.
- We also supply professional maintenance products.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. This moisture can cause stains that are difficult to remove.
- Keep the drainage holes clear to allow excess water to run off.
- The guarantee expires if you drill or grind in a way that is not specified.
- Clean annually by hosing dirt from the planter with clean tap water, followed by cleaning with detergent. Do not use a pressure washer and/or scouring pad for this purpose. This damages the coating.

RAL COLOURS

Standard RAL colours are RAL 7016, RAL 7021, RAL 9005 and RAL 9016. For all other available RAL colours, please check our website. There is a start-up charge for these colours.

Note! Colours may vary from the image.




RAL 7016

RAL 7021

RAL 9005

RAL 9016

Material fibreglass

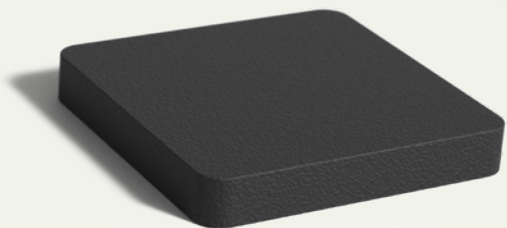

The CARREZ fibreglass planter gives gardens a modern look. The fibreglass planter is intended for outdoor use. By default, it is not waterproof. Other colours can be ordered for an additional cost, so there is a CARREZ fibreglass planter to match every design scheme.

Our fibreglass planter is made of high-quality reinforced fibreglass. This makes the planter sturdy. The reinforcement has been extended into the corners, which prevents splitting. The fibreglass is dyed through, and the planter will retain its colour.

SPECIFICATIONS

- 5-year guarantee.
- Fibreglass planters are frost-resistant and strengthened to prevent warping.
- Lightweight and very strong.
- Finished with a double-turned edge.
- The fibreglass has a thickness of 3 mm.
- Includes a channel for drainage and circles for drilling drainage holes.
- We also supply professional maintenance products.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. This moisture can cause stains that are difficult to remove.
- Always drill drainage holes in the base of the planter. The base has circles for drilling. These circles are connected by a drainage channel. After drilling the drainage holes, install the overflow pipe. This will ensure that no excess water remains in the planter.
- Fibreglass planters should always be installed on a flat surface. Do not place the planter on beams, stones, etc.
- The planter is not suitable for moving once filled.
- Clean at least twice a year with our ADEZZ cleaner/protector. Do not use a pressure washer and/or scouring pad. This damages the coating.
- The guarantee expires if you drill or grind in a way that is not specified.

RAL COLOURS

Standard RAL colours are RAL 7016, RAL 7021, RAL 9005 and RAL 9016. For all other available RAL colours, please check our website. There is a start-up charge for these colours.

Note! Colours may vary from the image.



RAL 7016

RAL 7021

RAL 9005

RAL 9016

Material fiberglass glossy



The CARREZ fiberglass planter gives gardens a modern look. The 'glossy' finish gives the planter a smooth and stylish appeal. The fiberglass planter is intended for outdoor use. By default, it is not waterproof.

Our fiberglass planter is made of high-quality reinforced fiberglass. This makes the planter sturdy. The reinforcement has been extended into the corners, which prevents splitting. The fiberglass is dyed through, and the planter will retain its colour. The 'glossy' finish gives the planter a smooth and stylish appeal.

SPECIFICATIONS

- 5-year guarantee.
- Fiberglass planters are frost-resistant and strengthened to prevent warping.
- Lightweight and very strong.
- The smooth finish makes this planter easy to maintain.
- Finished with a double-turned edge.
- The fiberglass has a thickness of 3 mm.
- Includes hidden feet and circles for drilling drainage holes. This ensures that the planter floats a little above the ground (15 mm) and has optimal drainage after drainage holes have been drilled.
- We also supply professional maintenance products.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. This moisture can cause stains that are difficult to remove.
- Always drill drainage holes in the base of the planter. The base has circles for drilling. These circles are connected by a drainage channel. After drilling the drainage holes, install the overflow pipe. This will ensure that no excess water remains in the planter.
- Fiberglass planters should always be installed on a flat surface. Do not place the planter on beams, stones, etc.
- The planter is not suitable for moving once filled.
- Clean at least twice a year with our ADEZZ cleaner/protector. Do not use a pressure washer and/or scouring pad. This damages the coating.
- The guarantee expires if you drill or grind in a way that is not specified.

RAL COLOURS

Standard RAL colours are RAL 7016, RAL 7021, RAL 9005 and RAL 9016.

For all other available RAL colours, please check our website. There is a start-up charge for these colours.

Note! Colours may vary from the image.



RAL 7016



RAL 7021



RAL 9005



RAL 9016

Material hardwood



The CARREZ hardwood planter gives gardens a robust and warm look. This planter is made of tropical hardwood. All our hardwood is classified as durability class 2 and will last up to 25 years. The use of hardwood creates a planter that blends beautifully with the lush greenery of the garden environment.

Due to the high durability class of the wood, this hardwood planter needs no further treatment. The planter will turn grey over time. This colour change does not affect the quality of the planter. The planter is constructed using only high-quality stainless-steel fasteners, and the base is lined with an anti-root membrane.

SPECIFICATIONS

- 5-year guarantee.
- Hardwood planters are strong and hard-wearing.
- We use only hardwood with durability class 2 in our hardwood planters.
- The hardwood has a thickness of at least 21 mm.
- The planter can be customised.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. This moisture can cause stains that are difficult to remove.
- All hardwoods turn grey when exposed to sun, rain and wind. The eventual colour partly depends on the initial colour of the hardwood.
- Wood is a natural product which shrinks or expands depending on temperature and moisture content. Regular oiling helps to stabilise the moisture content and limits shrinking and swelling. We recommend using Woca oil.
- We use stainless-steel screws. Like almost all woods, hardwood reacts when it comes into contact with iron. This can cause significant discolouration, which can look like mould.
- Remove metal shavings from tools (bits and drills) before use.
- Avoid contact with lawn fertiliser and cement. These contain traces of iron.
- The planter is not suitable for moving once filled.
- The guarantee expires if you drill or grind in a way that is not specified.



Installation

CORTEN STEEL

1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.
Note! Never use an overflow pipe with corten steel planters!
2. Pull rod in planters are essential for the construction and dimensional stability of the planter. A tension rod must never be removed!
3. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.

ALUMINIUM

1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.
2. If desired, place overflow pipes in the designated place in the bottom of the planter to create a water reservoir. The number of overflow pipes to be used depends on the number of drainage holes, view the drawings on our website for the correct number.
3. Pull rod in planters are essential for the construction and dimensional stability of the planter. A tension rod must never be removed!
4. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.

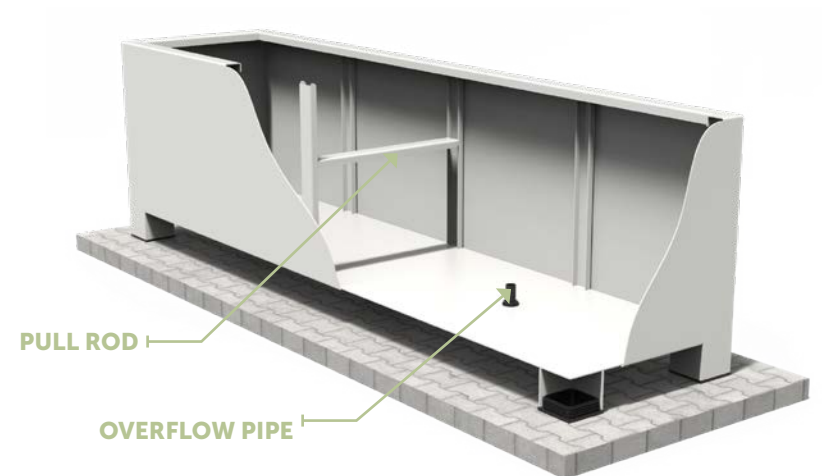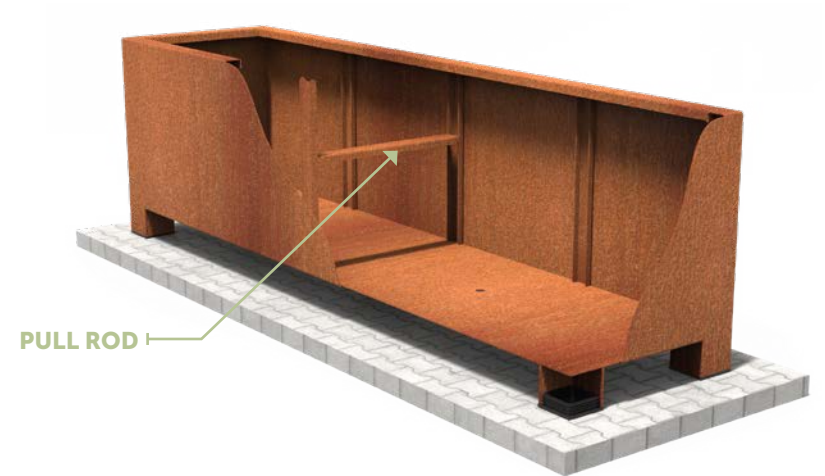

FIBREGLASS


1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.

Note! Always drill drainage holes in the bottom of the planter, use (if present) the raised parts of the bottom of the planter.

2. If desired, place overflow pipes in the designated place in the bottom of the planter to create a water reservoir. The number of overflow pipes to be used depends on the number of drainage holes, view the drawings on our website for the correct number.
3. Reinforcement ribs in planters are essential for the construction and dimensional stability of the planter. These must never be removed!
4. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.

HARDWOOD

1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.
2. Reinforcements in planters are essential for the construction and dimensional stability of the planter. Reinforcements must never be removed!
3. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.

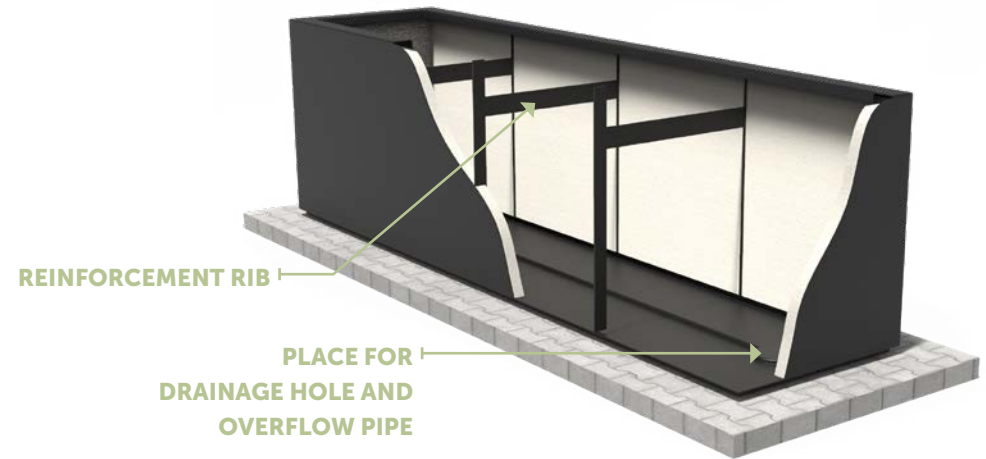

Planting advice

CORTEN STEEL



1. Cover the bottom of the planter with a layer of gravel (approx. 10 cm, Ø35 mm grading).
2. Place a permeable anti-root membrane over the gravel.
3. Cover the membrane with soil suitable for your chosen plants.
4. Do not use an overflow pipe; no water should remain in the corten steel planter.

ALUMINIUM AND FIBREGLASS (GLOSSY)

1. Insert the overflow pipes into the drainage holes prepared for them.
2. Fill the planter with about 10 cm of drainage material.
3. Place a permeable anti-root membrane over the drainage material.
4. Cover the membrane with soil suitable for your chosen plants.
5. Keep the drainage holes clear so that excess water can run off.

HARDWOOD


1. Fill the planter with about 10 cm of drainage material.
2. Place a permeable anti-root membrane over the drainage material.
3. Cover the membrane with soil suitable for your chosen plants.
4. Keep the drainage holes clear so that excess water can run off.

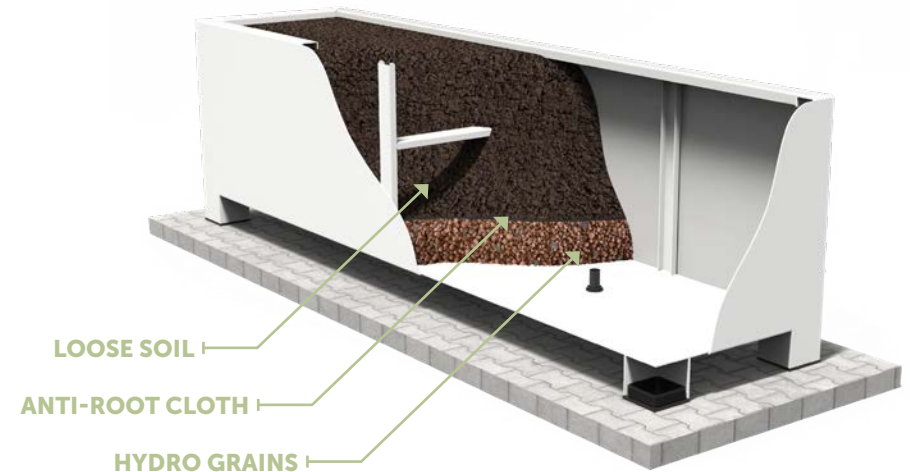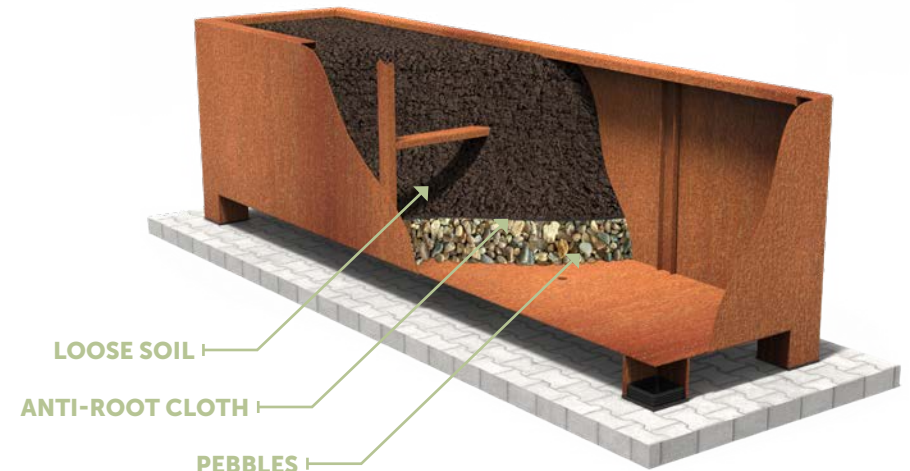

Install wheels


CORTEN STEEL

1. Wheels are supplied separately with the planter. Assembly is very easy, see image on the right.
2. Insert the bolt with washer on the inside of the planter through the hole in the square plate.
3. Slide the wheels over the bolts and then tighten them with the supplied nuts.

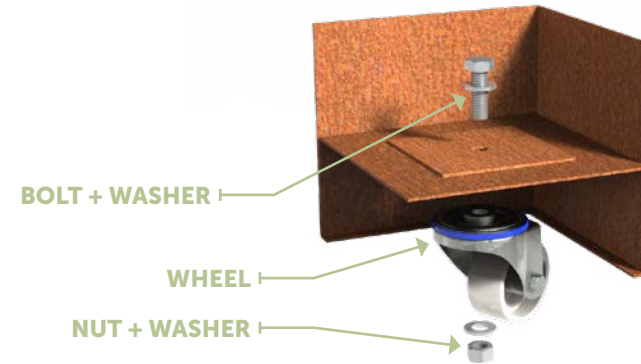


ALUMINIUM

1. Wheels are supplied separately with the planter. Assembly is very easy, see image on the right.
2. Insert the bolt with washer on the inside of the planter through the hole in the square plate.
3. Slide the wheels over the bolts and then tighten them with the supplied nuts.

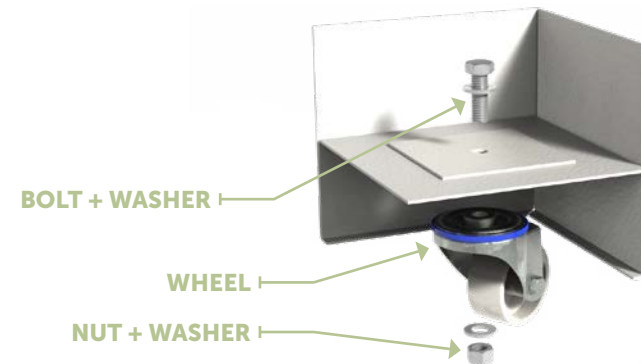

FIBREGLASS

1. Wheels are supplied separately with the planter. Assembly is very easy, see images on the right.
2. Position the wooden board with the four large holes upwards and press the carriage bolts firmly all the way in (see detailed picture).
3. Then slide the wheel over the bolt and tighten it with the supplied nut.
4. Then place the wooden board with wheels under the planter, they do not need to be connected to each other.

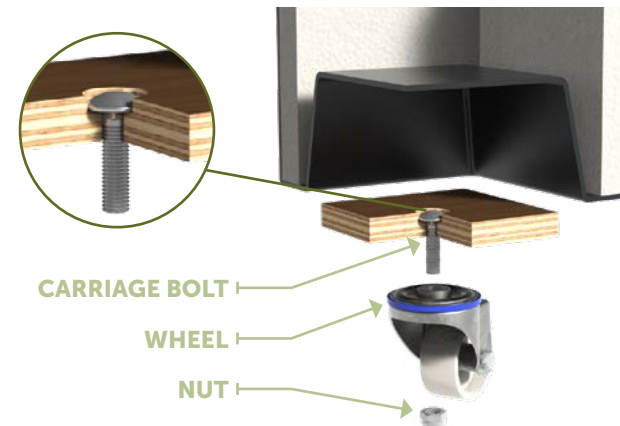


Infinity system corten steel

Thanks to the infinity system, it is possible to create an "infinitely" long planter (delivered in sections). The system can be used for both curved and straight shapes. All supplies for connecting the planters are included.



BLINDLY CONNECTED

Simple bolt and nut construction makes mounting easy.

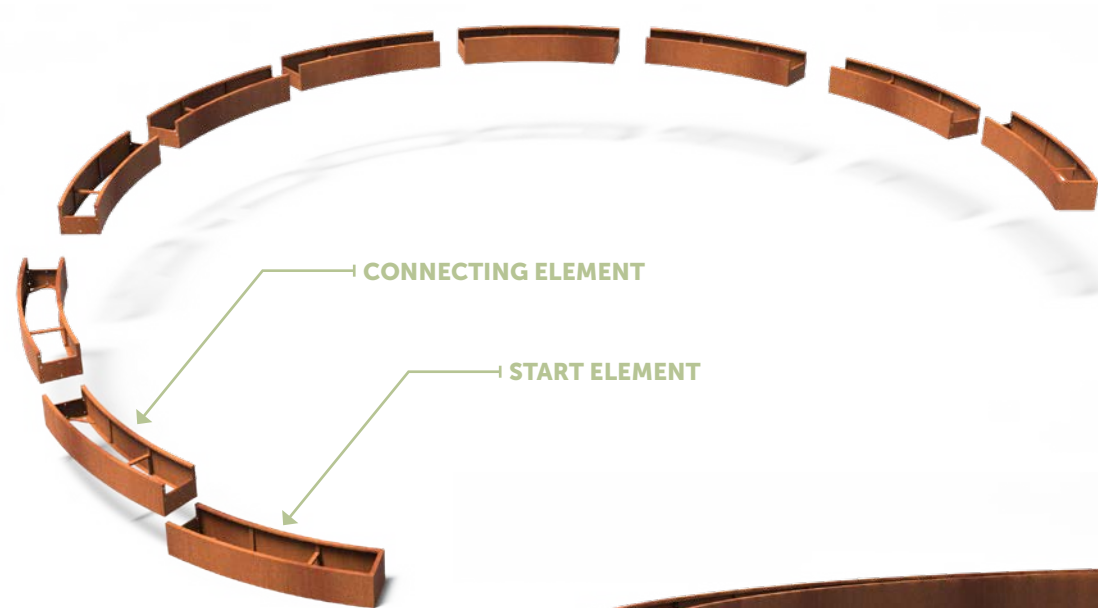


Infinity system aluminium

Thanks to the infinity system, it is possible to create an "infinitely" long planter (delivered in sections). The system can be used for both curved and straight shapes. All supplies for connecting the planters are included.




BLINDLY CONNECTED

Simple bolt and nut construction makes mounting easy.

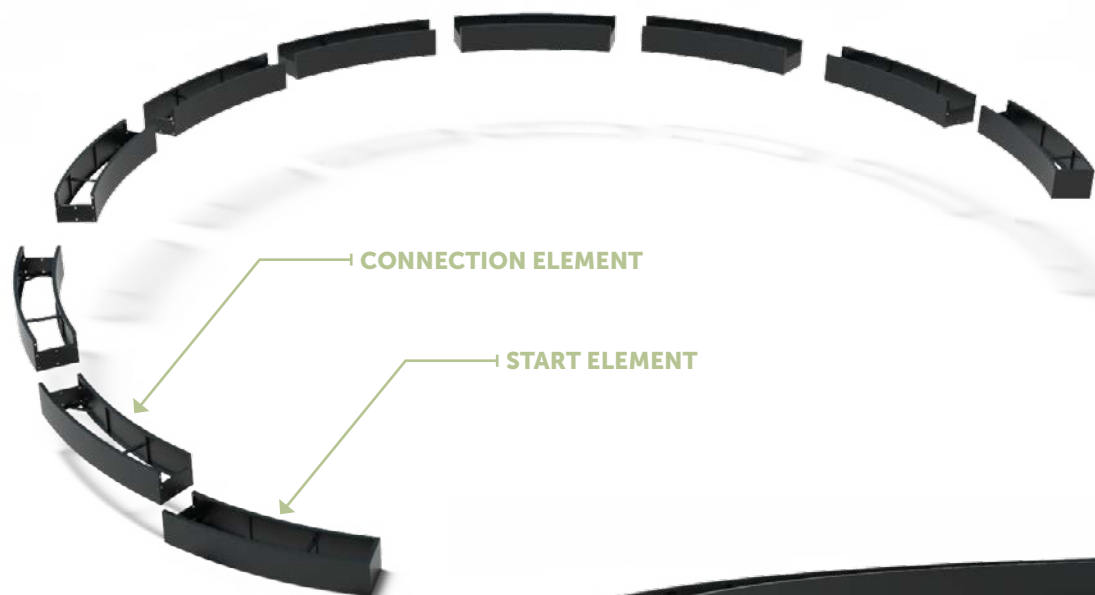


Infinity system hardwood

Thanks to the infinity system, it is possible to create an "infinitely" long planter (delivered in sections). All supplies for connecting the planters are included.

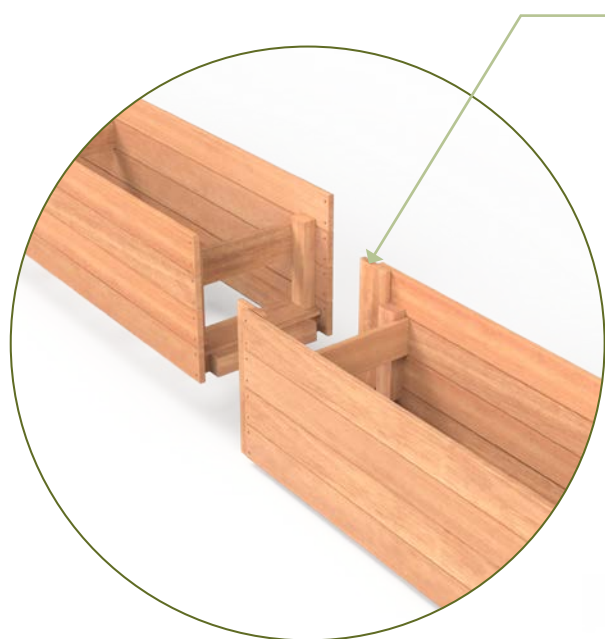

BLINDLY CONNECTED
Slide planters together
and connect with
provided screws.

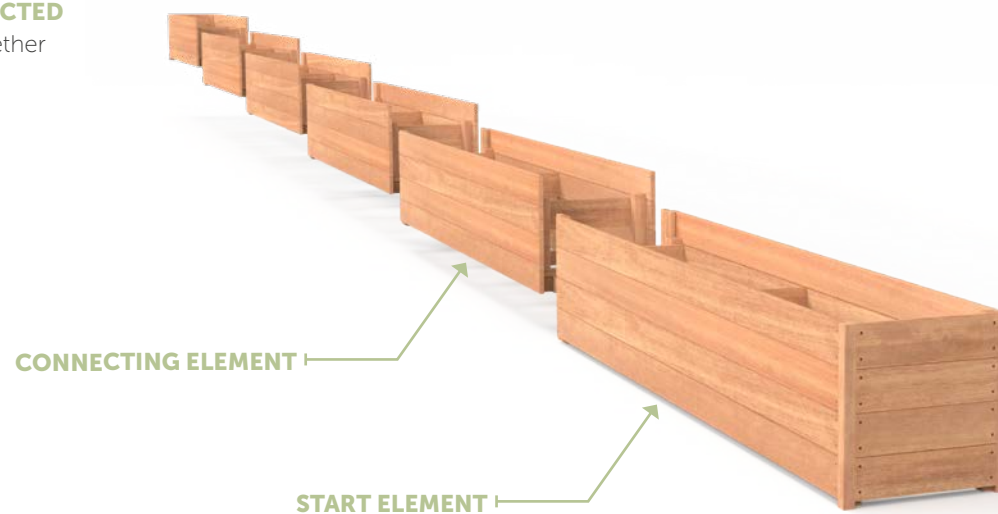

Models

For a complete overview of all our products and specifications, please visit www.adezz.com.



Accessories

All our accessories meet the highest standards and are a highly suitable addition to our products. Visit www.adezz.com for a complete overview of our accessories.



RUST ACCELERATOR

CORTEN STEEL

Our corten steel products are delivered un-rusted and the weathering process will take approximately 4-5 months. This process can be accelerated with the BIO rust accelerator available on our website. Always read the descriptions on the packaging carefully before use.



CORTEN VARNISH

CORTEN STEEL

Corten varnish can be applied to the corten steel products to stop the weathering process. Always read the descriptions on the packaging carefully before use.



CLEANER & PROTECTOR

ALUMINIUM - FIBREGLASS

We recommend cleaning our products at least twice a year. For optimal results, use the ADEZZ BIO Cleaner & Protector. Always read the descriptions on the packaging carefully before use.



Accessories

All our accessories meet the highest standards and are an highly suitable addition to our products. Visit www.adezz.com for a complete overview of our accessories.



WHEELS

CORTEN STEEL - ALUMINIUM FIBREGLASS - HARDWOOD

Wheels are an option on many of our products. Check www.adezz.com for the options per product (Total load capacity 450kg).



OVERFLOW PIPE

ALUMINIUM - FIBREGLASS

Overflow pipes provide a water buffer at the bottom of the planter and fit into the standard drainage holes, making them easy to install.

ADEZZ

DESIGN TO GROW

Spending time outdoors has soared in popularity over the last few years, becoming an increasingly important part of our daily lives. Our brands ADEZZ, FORNO and FURNS offer a diverse range of products guaranteed to enhance the outdoor experience. Our collections create an ambience in which you can enjoy your garden to the fullest.

All brands have their own character, but they are designed to work together, allowing you to create endless combinations. The materials, finishes and styles are repeated across the collections so that they coordinate beautifully. The result? A long-lasting, stylish garden design: from sleek edging to exclusive furniture and from sturdy fireplaces to elegant water tables.

We design and manufacture all our products in-house, ensuring that we can continue to provide the high quality that you have come to expect from us. And we do this at the most competitive price possible. All our products are made in Europe with the utmost care, so we can be sure that they meet our exacting standards.

