

LETTER BOXES



Product description

In our collection we have timeless letter box models, which are available in either Corten Steel or powder coated Aluminum. The Aluminum powder coated models can be made in almost any RAL colour. It is possible to order numbers and letters for any of the models (glue will be supplied). All letter boxes have a lockable door on the back side and are supplied with two keys. They are attached to the bottom of the letter box.

SPECIFICATIONS

General information

Our letter boxes consist out of:

- Thickness Corten min. 1,5 mm
- Thickness Aluminum min. 2 mm
- Lockable door including 2 keys
- 5 year warranty (descending)

Corten

- Brown-orange rust colour
- Delivered un-rusted
- Rust process takes 4-5 months
- BIO rust accelerator available

Options

- House numbers and letters

Aluminum

Standard colours RAL 7021, RAL 7035, RAL 9016.

Our letter boxes are available in almost any RAL colour (start-up costs apply).

IMPORTANT

Points of attention

- The products must be unpacked immediately after delivery.
- Corten Steel should never be constantly in moisture, it should drain well and ventilate in all situations.
- We only use Corten steel type S355J0WP.
- Coastal areas: We do not recommend using Corten steel within a radius of 2 km from a coastline.
- During the weathering process rust residue can come off the product.
- Drilling / grinding in the material is not permitted.

Maintenance


- Annual cleaning by removing dirt using clean tap water.
- Clean Aluminium with our Adezz Cleaner.
- **Note!** Do not use a high-pressure cleaner or abrasive sponge.
- Maintenance products are sold by Adezz (page 4).

PLACEMENT

INSTALLATION

1. Provide a flat (vibrated), solid surface. If not done carefully, it may result in damage to the product.

2. Drill holes at the position of the slotted holes in the base plate. The round holes are for drainage and must not be used as mounting holes!

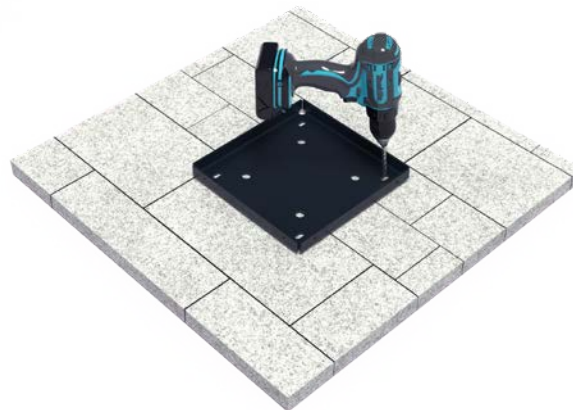

3. Fix the base plate to the pavement with plugs or possibly a chemical anchor.

Note! First loosely tighten all the bolts, after which they can be tightened fully one by one.

4. Place the letter box over the base plate.




5. Attach the letter box to the base plate with the supplied Allen screws.

Because the letter box can be placed on the pavement, the box can be placed anywhere without having to dig.

It is also possible to place the letter box below ground level, so that the mounting part of the letter box disappears below ground level.

Note! Letter box Flyn is installed without a base plate.

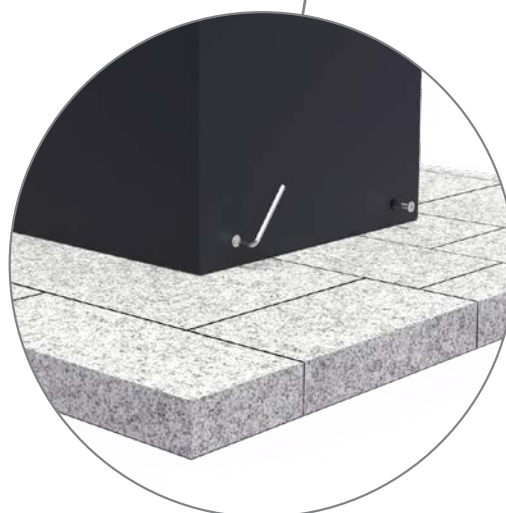

LETTER BOXES

MODELS

For a complete overview of all our products and specifications, please visit www.adezz.com



IVAR CORTEN



IVAR ALUMINUM



NOX CORTEN



NOX ALUMINUM



FLYN CORTEN



FLYN ALUMINUM

ACCESSORIES

ACCESSORIES

All our accessories meet the highest standards and are an highly suitable addition to our products. Visit www.adezz.com for a complete overview of our accessories.



CLEANER & PROTECTOR

We recommend cleaning our products at least twice a year. For optimal results, use the ADEZZ BIO Cleaner & Protector. Always read the descriptions on the packaging carefully before use.



RUST ACCELERATOR

Our Corten Steel products are delivered un-rusted and the weathering process will take approximately 4-5 months. This process can be accelerated with the BIO rust accelerator available on our website. Always read the descriptions on the packaging carefully before use.



CORTEN VARNISH

Corten varnish can be applied to the Corten Steel products to stop the weathering process. Always read the descriptions on the packaging carefully before use.



HOUSE NUMBERS AND LETTERS

House numbers and letters can be ordered in Corten Steel and Stainless Steel. With the supplied kit, they can easily be attached to the location of your choice on the letter box.